

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
31 July 2003 (31.07.2003)


PCT

(10) International Publication Number  
WO 03/062846 A2

- (51) International Patent Classification<sup>7</sup>: G01R 33/385
- (21) International Application Number: PCT/IB03/00086
- (22) International Filing Date: 15 January 2003 (15.01.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
102 02 986.5 26 January 2002 (26.01.2002) DE
- (71) Applicant (for DE only): PHILIPS INTELLECTUAL PROPERTY & STANDARDS GMBH [DE/DE]; Stein-damm 94, 20099 Hamburg (DE).
- (71) Applicant (for AE, AG, AL, AM, AT, AU, AZ, BA, BB, BE, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CY, CZ, DK, DM, DZ, EC, EE, ES, FI, FR, GB, GD, GE, GH, GM, GR, HR, HU, ID, IE, IL, IN, IS, IT, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MC, MD, MG, MK, MN, MW, MX, MZ, NL, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SZ, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW only): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SCHULZ, Volkmar [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE). GLEICH, Bernhard [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE). WEIZENECKER, Jürgen [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).
- (74) Agent: VOLMER, Georg; Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: COIL SYSTEM FOR AN MR APPARATUS AND AN MR APPARATUS PROVIDED WITH SUCH A COIL SYSTEM

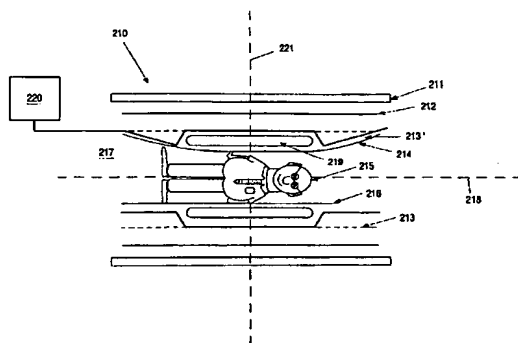

(57) Abstract: A coil system (210) for an apparatus operating in conformity with the spin resonance or magnetic resonance (MR) method encloses an examination space (217) which extends along an axis (218) and is intended to receive a patient (215). It includes an inner RF coil (219), an inner sub-coil (213') which externally encloses the RF coil (219) and projects beyond the RF coil (219) in the axial direction at both sides, and an active shield (212) which externally encloses the inner sub-coil (213') and constitutes a gradient coil arrangement in conjunction with the inner sub-coil (213'). For specified gradients, the energy required for the gradient coil arrangement (213', 212) in such a coil system is reduced in that the volume occupied by the inner sub-coil (213') is extended in the axial direction by way of regions extending beyond the RF coil (219) in the direction of the axis (218). It is an essential aspect that generally three gradient coils are accommodated in the volume enclosed by the gradient coil arrangement (213', 212). This layered arrangement produces three mutually perpendicular gradient fields as usual. However, it is not necessary to calculate these fields to be such that they extend perpendicularly to one another. All three coil arrangements per se require a smaller energy component in comparison with the normal case.